rocketfish™

Rocketboost™ Wireless Sender/Receiver

RF-RBAUX

User Guide

Rocketfish RF-RBAUX Rocketboost™ Wireless Sender/Receiver

Contents

Introduction 3
Important safety instructions 4
Features 7
Setting up your sender/receiver 13
Using your sender/receiver 20
Expanding your Rocketboost System 25
Maintaining your system 26
Troubleshooting 27
Specifications 29
Legal notices 29
One-year limited warranty 33

Introduction

Congratulations on your purchase of the Rocketboost™ Wireless Sender/Receiver. This product represents the state of the art in 2.4 GHz wireless audio design. When used with other Rocketboost products you can enjoy your music throughout your house without the limitations of cables.

The RF-RBAUX can be use as both a sender and a receiver. As a sender you can connect it to your audio source devices (like home theater, mp3 player, or PC) and then receive that audio using any other Rocketboost receiver. As a receiver you can connect it your stereo system or amplified speakers and then listen to the audio from any other Rocketboost sender. By using other Rocketboost™ wireless audio products, you can also configure multiple audio streams and listen to any of those audio streams at any Rocketboost receiver device.

With a maximum 150-foot broadcast range, this powerful wireless device transmits through walls, floors, and ceilings. The audio signal is uncompressed digital audio so your audio is the highest quality and is free from interference.

This User Guide explains how to correctly install, operate, and get the best performance from your Rocketboost Wireless Sender/Receiver. Read this guide carefully before installing your system, and then keep it handy for quick reference.

Important safety instructions

CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN

The lightning flash with arrowhead symbol, within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

CAUTION:

TO REDUCE THE RISK OF ELECTRIC SHOCK:
DO NOT REMOVE SCREWS, COVERS OR THE CABINET.
NO USER SERVICING PARTS INSIDE.
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Unplug this apparatus during lightning storms or when unused for long periods of time.
13. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
14. To reduce the risk of fire or electric shock, do not expose this device to rain, moisture, dripping, or splashing, and no objects filled with liquids, such as vases, shall be placed on it.
15. The wall plug is the disconnecting device. The plug must remain readily operable.
16. Batteries should not be exposed to excessive heat such as sunlight, fire, or the like.

    ***Caution**: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.*

***Warning**: Read the Rating Label on the bottom of the unit for power input and other safety information.*

***Caution** - Proper Installation*

Install the system in a place which is level, dry and neither too hot nor too cold. The appropriate temperature is between 5° C and 35° C.

Install the system in a location with adequate ventilation to prevent internal heat from building up inside the unit.

Caution - Proper ventilation

To avoid risk of electric shock and fire, and to prevent damage, locate the apparatus for adequate ventilation.

What is Rocketboost™?

Rocketboost™ is expandable wireless digital audio.

- Products with Rocketboost™ technology let you easily expand your listening experience throughout your home.
- Rocketboost™ does not interfere with other wireless products in your home.
- Rocketboost™ is uncompressed digital audio compatible with all audio formats such as Dolby TrueHD, and DTS-HD Master Audio used with Blu-ray.

When you see the Rocketboost™ logo on any product, it has been designed to work with other Rocketboost™ products, no matter who manufactures them.

How does Rocketboost™ work?

Rocketboost technology can connect all audio devices throughout your home to form a home audio network.

Rocketboost products include "Senders," which send or transmit audio streams, and "Receivers," which receive the audio. This lets you listen to music from your Sender in other rooms using your Receiver.

Rocketboost is expandable. Each Rocketboost Receiver can select the audio from any Sender in your Rocketboost audio network. The following shows an example Rocketboost network. You can set up your network to meet your specific needs.

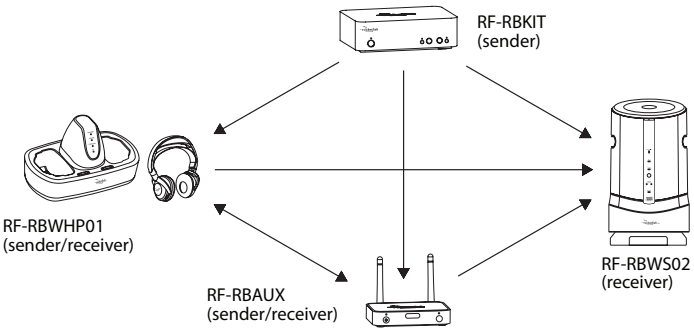

We hope you enjoy your new Rocketboost system. Remember that it's designed to grow with your home entertainment needs, and that it's easy to add a new device to the network as you expand your system.

Features

- High-Performance Audio - Uncompressed digital CD-quality stereo sound, adjustable volume control
- Strong Wireless Signal - 150 ft. wireless range (maximum, line of sight), great sound, no static, won't interfere with your other wireless products, compatible with all Rocketboost products
- Easy to use - Easy to set up
- Expandable - add more Rocketboost products to listen to music throughout your house

Package contents

The box should contain the following:

Wireless sender/ receiver

AC power adapter for sender/ receiver

3.5 mm audio cable

3.5 mm to RCA adapter cable (6 in, 0.15 m)

Remote control

User Guide

Quick Setup Guide

Sender/receiver (front panel)

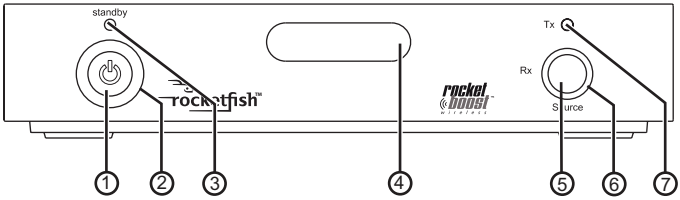

#	Feature	Description
1	Power/Join button	Press to turn the sender/receiver on. Press and hold to initiate joining. Press again to go to standby mode. When you connect the AC power adapter, the device turns on automatically.
2	Power/Join indicator	Lights blue when the **HUB STATUS** switch is set to DISABLE. Lights green when the **HUB STATUS** switch is set to ENABLE. The indicator will turn solid when it is joined in a network, if the device is not in a network, the indicator blinks slowly. When the device is put in joining mode, the indicator blinks rapidly.
3	Standby indicator	Turns red when the sender/receiver is in standby mode.
4	Remote control sensor window	Receives the signal from the remote control.
5	Source	Press to select different audio streams on your Rocketboost network. Each press moves to the next source.
6	Receiver mode indicator	Turns blue when receiving audio from a Rocketboost sender. Blinks slowly if the current source listened to is muted. **Note:** This indicator will not be lit if the Rocketboost sender is turned off. Press the **SOURCE** button to find the next available source.
7	Sender mode indicator	Turns blue when sending audio. **Note**: This indicator will light automatically when a 3.5 mm connector is attached to the device (the device senses the cable connection).

Sender/receiver (back panel)

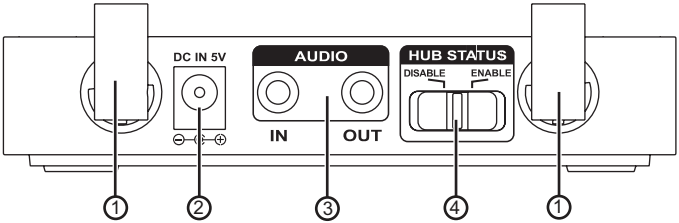

#	Feature	Description
1	External antenna	Receives audio from senders. Sends audio to receivers.
2	DC IN jack	Plug the AC power adapter into this jack.
3	AUDIO IN/OUT jacks	When used as a sender, plug an audio source device into the **AUDIO IN** jack. When used as a receiver, plug your amplifier or amplified speakers into the **AUDIO OUT** jack. Note, this device operates as both a sender and receiver, so you can use it simultaneously to send and receive audio on your Rocketboost network.
4	HUB STATUS switch	Enables and disables hub mode operation. See "Establishing communication" on page 21 for more information.

Remote control

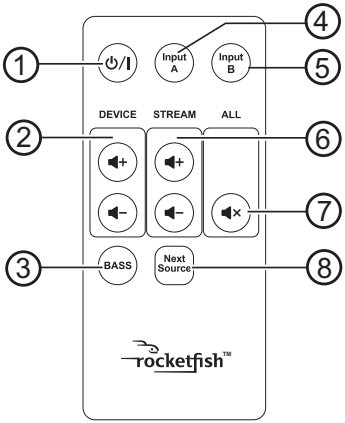

#	Feature	Description
1	⏻/| Standby/On button	Press to turn the sender/receiver on. Press again to enter standby mode.
2	Volume 🔊+/🔉– buttons (device)	Press to adjust the volume on Rocketboost devices that support volume control (for example, RF-RBWS02 wireless outdoor speaker). The sender/receiver is a line-level device, so volume controls are not supported on this unit. The volume on the local amplifier or powered speakers must be adjusted when listening to the sender/receiver's line-level out.
3	**BASS** button	Press to enable/disable the BASS enhancement. (This unit does not support BASS boost, but the remote control can be used on other Rocketboost products that do support it.)
4	**Input A**	Press to toggle between **SPEAKER-In A** or **Pre-In A** of the sender (only applies to Rocketboost model RF-RBKIT, purchased separately).

#	Feature	Description
5	**Input B**	Press to toggle between **SPEAKER-In B** or **Pre-In B** of the sender (only applies to Rocketboost model RF-RBKIT, purchased separately).
6	Volume 🔊+/🔊– buttons (stream)	Press to adjust the volume of all devices receiving the same audio stream. The sender/receiver is a line-level device, so stream volume controls are not supported. The volume on the local amplifier or powered speakers must be adjusted when listening to the sender/receiver's line-level out.
7	🔇 (mute - all)	Press to mute all audio streams in your Rocketboost network. Pressing mute again at any Rocketboost receiver will "unmute" the stream that was last heard at that receiver. This stream can now be heard from any other receiver that was receiving that stream. Other streams are unmuted in the same way: pressing mute again at each receiver will unmute the stream that was last heard at that receiver.
8	**Next Source** button	Press to select different audio streams on your Rocketboost network. Each press moves to the next source.

Setting up your sender/receiver

Initial setup

To set up your sender/receiver:

1. Unpack the package contents.
2. Adjust the antennas. For best results, raise the antennas of the sender/receiver to the vertical position.

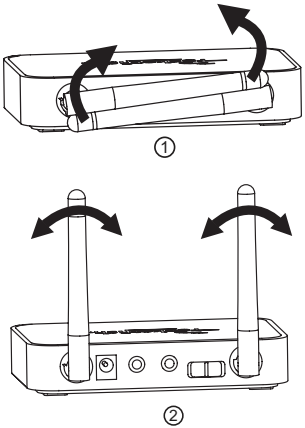

Tip*: In some cases, you may improve range by rotating both antennas 45° to create a 90° angle similar to a wide "V".*

Note*: Make sure that the device is located at least 18" (.46 m) from any WiFi router.*

Setting up and using your remote control

To set up and use your remote control:

1 Remove the insulation sheet in the battery tray before using the remote control for the first time.



2 Aim the remote control at the IR sensor on the front from a maximum distance of 23 ft. (7 m) away and a maximum angle of +/- 30 degrees from the center line.

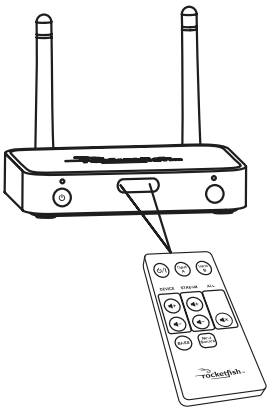

To replace the battery:

1 Press the battery tray lock to the right, then slide out the battery tray. You can remove the battery door with your fingernails by using the spaces set back in the remote control.



2 Match the polarity on the lithium cell with a plus sign (+) on the battery tray.

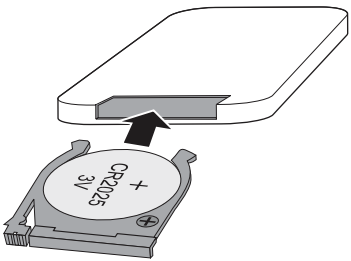

Replace the battery with a CR2025 or equivalent.

3 Slide the tray with the new battery into the battery compartment until it clicks into place.

Warnings:

Danger of explosion if battery is incorrectly replaced.

Replace only with the same or equivalent type of battery.

Notes:

Remove the battery from the remote control when it is not to be used for a long period. Otherwise it might be damaged due to battery leakage.

Do not drop or jar the remote control.

Do not spill water or any liquid on the remote control.

Do not place the remote control on a wet object.

Do not place the remote control under direct sunlight or near sources of excessive heat.

Connecting your wireless sender/receiver

Rocketboost technology can connect all audio devices throughout your home to form a home audio network.

Rocketboost products include "senders," which send audio streams, and "receivers," which receive the audio. This lets you listen to music from your sender in other rooms, using your receiver.

The RF-RBAUX works as both a Rocketboost sender and receiver, so you can use it in either configuration. In fact, you can even use it as a sender and receiver simultaneously.

Rocketboost is expandable. Each Rocketboost receiver can select the audio from any sender in your Rocketboost audio network. You can set up your network to meet your specific needs. The illustration shows an example Rocketboost network.

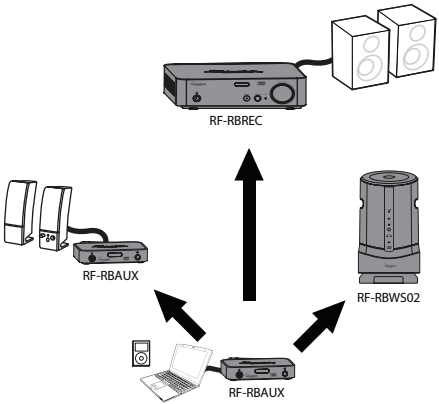

Using as a sender

The sender/receiver can be connected to an MP3 player, PC, or other audio device to send music to other Rocketboost receivers.
An example configuration is shown below.

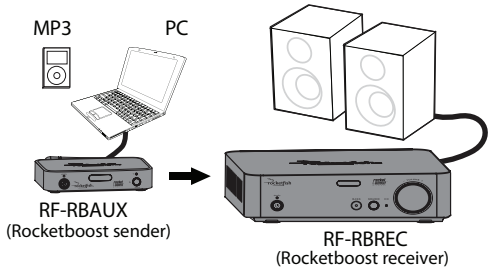

Connect your audio source to the Audio In jack on the rear of the sender using the 3.5 mm audio cable. If necessary, you can also use the 3.5 mm to RCA adapter if your audio device uses RCA type line out connectors.





Using as a receiver

The sender/receiver can be connected to an amplifier or amplified speaker to receive music from other Rocketboost senders.
An example configuration is shown below.

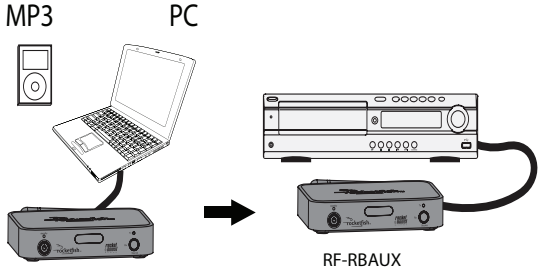

Connect your powered speaker or amplifier to the Audio Out jack on the rear of the sender using the 3.5 mm audio cable. If necessary, you can also use the 3.5mm to RCA adapter, if your audio device uses RCA type line in connectors.

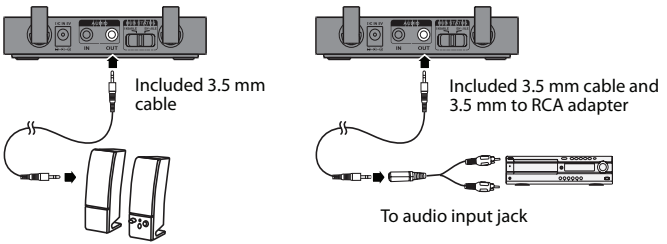

Connecting power to the sender/receiver

To connect the power:

1 Connect the AC power adapter to the sender/receiver and plug into an AC power outlet. The sender/receiver automatically turns on and the power indicator turns green or blue, depending on the hub status switch position.

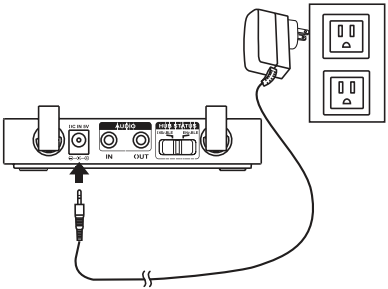

Notes:

- Make sure that the AC power outlet matches the sender/receiver's AC input (100-240V) before connecting.

- Connect the AC power adapter to an AC power outlet only after all other connections are completed.

Using your sender/receiver

Turning on your sender/receiver

To turn the sender/receiver on and off:

1 When initially connecting to an AC outlet, the device automatically turns on. To turn off the device, press ⏻. The power indicator turns off and the standby indicator turns red.

2 If the sender/receiver is off, press ⏻ to turn it on. The power indicator lights.

Establishing communication

Rocketboost products form an audio network and each Rocketboost receiver can select the audio from any Rocketboost sender in the network.

Important

Every Rocketboost network must contain one hub device, which helps devices join the network. The network can have only one hub, which you can enable using the hub switch on the back of all Rocketboost senders and sender/receivers.

If this is your first Rocketboost product, you should make the sender/receiver the hub, if you already have Rocketboost products, you should disable hub mode on this device.

Important: *Hub devices must always have power for your network to operate. The hub device can be in standby (power saving) mode, but must stay plugged in.*

All Rocketboost devices must be "joined" or wirelessly connected to your Rocketboost hub device so that audio can be sent between them. The following steps describe how to join Rocketboost devices.

To establish communications:

1. If you are setting up your network for the first time, choose one of your Rocketboost senders to be your hub device by setting the Hub Status switch to Enable. For example, if you want the sender/receiver to be the hub, set the **Hub Status** switch on the sender/receiver to **Enable**.
2. If you already have a Rocketboost network established, set the **Hub Status** switch on the sender/receiver to **Disable**.

   The sender/receiver power indicator lights green if the sender/receiver Hub Status switch is enabled, or lights blue if the sender/receiver Hub Status switch is disabled.
3. If possible, bring your Rocketboost hub device, and the new Rocketboost device to which you'd like to join to the hub, into the same room.
4. Press the ⏻ on the Rocketboost hub device to turn it on.
5. Press the ⏻ on your other Rocketboost device to turn it on.

6 Press and hold the ⏻ on the Rocketboost hub device for more than three seconds to put it into joining mode. The power indicator starts blinking rapidly and the unit will stay in joining mode for 30 seconds. The diagram (below) shows an example of this. In this example, the sender/receiver is the hub device.

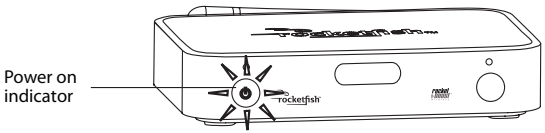

7 Press and hold the ⏻ on your other Rocketboost device for more than three seconds to put it into joining mode.
- When successfully joined, the power indicator LEDs on both products will stop blinking and stay on.
- If joining fails after 30 seconds, the power indicator LEDs will begin flashing at a slower rate. If this occurs, repeat the above steps.
- Repeat steps 2-7 for each additional Rocketboost device you are adding to your network.

Listening to music

To listen to music:

1 Make sure the volume is turned up on the audio device connected to your Rocketboost sender.

2 Play music from the audio device connected to your Rocketboost sender.

Note: *When using the sender/receiver as a sender, the Tx LED will light when you are correctly connected to an audio source.*

3 Adjust the volume level on the audio device you have connected to your Rocketboost receiver. If you have multiple audio sources in your Rocketboost network, press the Source button on the Rocketboost receiver to hear the next audio source. Press the Source button again to cycle through all available audio sources.

Note: *When using the sender/receiver as a receiver, the Rx LED will light when you are receiving an audio source from the Rocketboost network.*

Controlling the device volume

When the sender/receiver is used as a receiver, the output volume is adjusted at the amplifier or powered speakers connected to the receiver. The sender/receiver remote control device volume controls can be used with other Rocketboost devices that support volume (for example RF-RBWS02 wireless outdoor speaker).

Muting all devices

Rocketboost also features a global mute feature that instantly silences all audio streams in the network.

To mute all devices in the network:

1. Press **ALL** (mute) on the remote control. All audio streams in your network are muted.



2. Pressing **ALL** (mute), while aiming at a specific Rocketboost receiver, will "unmute" the stream that was last heard at that receiver. This stream can now be heard from any other receiver that was receiving that stream. Other streams are unmuted in the same way: pressing mute again at each receiver will unmute the stream that was last heard at that receiver.

Turning off the system

To turn off the system:

- Press ⏻ on the sender/receiver to turn off the unit.
  - The power indicator turns off and the standby indicator lights red.
  - Remove the AC power adapter from the AC power outlet to power off the device completely.

***Notes**:*

- If there are other transmitters and receivers in the network, you must keep your Hub powered on. The hub can be in standby, but it needs to be connected to the AC adapter.

- The device has its own memory. After the sender/receiver and other Rocketboost devices are joined, they will remember each other and join automatically when they are powered on again.

To turn off the transmitter:

- Remove the 3.5 mm plug from the back of the device and the sender will automatically stop sending. The Tx (transmit) indicator will go out.

Expanding your Rocketboost System

Rocketboost technology is expandable. Each Rocketboost Receiver can select the audio from any Sender in your Rocketboost audio network. The following shows an example Rocketboost network. You can set up your network to meet your specific needs.

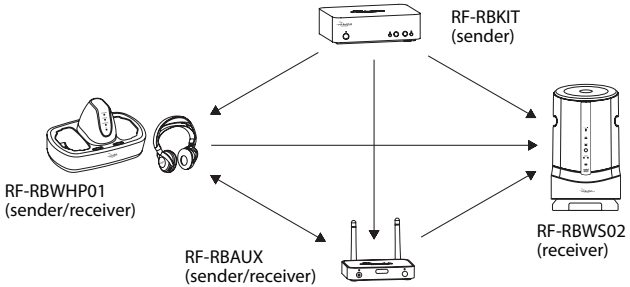

- RF-RBWS02, Rocketboost Wireless Outdoor Speaker, includes a wireless speaker and the RF-RBAUX wireless sender/receiver. Audio sources connected to the sender/receiver can be listened to using the wireless speaker.
- RF-RBAUX, Rocketboost Wireless Sender/Receiver can be used as both a sender and a receiver. As a sender you can connect it to your other audio source devices (like home theater or mp3 player) and then receive that audio using your outdoor wireless speaker or any other Rocketboost receiver. As a receiver you can connect it your stereo system or amplified speakers and then listen to the audio from any other Rocketboost sender.
- RF-RBREC, Rocketboost Amplified Audio Receiver, is an amplified receiver. You connect speakers to this and then listen to audio from any of your Rocketboost sender devices. This is a great way to expand your Rocketboost system to listen to your music anywhere in the house.
- RF-RBKIT, Rocketboost Wireless HD Starter Kit, includes a sender device and the RF-RBREC, amplified receiver. This product can be

used for home theater wireless surround sound of for multi-room audio.
- RF-RBWHP01, Rocketboost Wireless Headphones, include a sender device and wireless headphones. Audio sources connected to the sender can be listened to using the wireless speakers.

For more information, and to see what other Rocketboost products are available, visit www.rocketboost.com.

Rocketboost Network Capabilities

The maximum number of Rocketboost devices in a Rocketboost Network is 9. If you already have 9 devices and attempt to join another one, then joining will fail for the new device.

***Note**: If you want to remove a device from your Rocketboost network you need to rejoin it to a different hub device (this basically creates a 2nd Rocketboost network).*

The maximum number of audio streams that can be sent simultaneously on the Rocketboost network is:

- 5 stereo CD quality -or-
- 1 stereo HD quality + 3 CD quality -or-
- 2 stereo HD quality + 2 stereo CD quality -or-
- 3 stereo HD quality

***Note**: HD streams are available if using the RF-RBKIT sender. If your system is in a maximum audio stream state, then the TX indicator will not light on the sender devices that have exceeded the maximum. To use those device's audio streams, you need to turn off one of your other senders.*

Maintaining your system

Use a soft cloth dampened with a weak solution of mild detergent and water. Dry the device immediately afterwards with a clean cloth. Do not use abrasive cloth, thinners, alcohol, or other chemical solvents, because they may damage the finish or remove the panel lettering.

***Cautions**:*

Do not block the ventilation openings.

If the power cord is damaged, it must be repaired by a qualified technician.

Troubleshooting

Check this information for a possible solution before calling for assistance.

General troubleshooting

- Every Rocketboost network must contain only one hub device, which helps other Rocketboost devices join the network.
  - You can turn any Rocketboost sender or sender/receiver into a hub by using the HUB STATUS or HUB ENABLE switch on the back of the device. The network can only have one hub.
  - The hub device must have power for the audio network to operate. The hub can be in standby (power-saving mode), but must remain plugged in.
  - The existing hub device will be the device with the green power indicator.
- The unobstructed operating range of a Rocketboost network is 150 feet (45 meters).
- Each network must contain both a sender device and a receiver device. Do you have both a sender and a receiver device?

Problem	Solution
No communication between the Rocketboost sender and receiver devices.	• Make sure that the power indicators of the Rocketboost sender and receiver devices are lit solidly. If the indicators are blinking, see "Establishing communication" on page 21. • If the joining process is failing, make sure that only one of your Rocketboost devices has the Hub switch enabled. Note that the hub device will be the only device with the green power indicator. Non-hub devices have a blue power indicator.
No sound	• Check the volume level of the audio sources connected to the sender. • Make sure that all of the audio cables are connected correctly. • Make sure that the power indicators of the Rocketboost sender and receiver devices are lit solidly. If the indicators are blinking, see "Establishing communication" on page 21. • Make sure the audio source connected to your sender is On. • Make sure the sender or receiver devices are not Muted. The Rx indicator light blinks when the device is muted.

Problem	Solution
My Rocketboost remote will not control the volume. I can't turn the volume up or down.	• Make sure you have removed the insulation sheet in the battery tray of the Rocketboost remote. • To maximize your volume level through the system, make sure your source devices (i.e., A/V receiver, iPod, etc.) have their volume turned up to at least 50% of their volume level. • The battery in your remote may be dead. Try replacing it with a new battery. • Rocketboost remote volume controls are not supported by the RF-RBAUX sender/receiver, since it uses a line-level output. The volume can be controlled at the amplifier or powered speaker connected to the sender/receiver.
The sound/audio is really quiet coming out of my speakers.	• To maximize your volume level through the system, make sure your source devices (i.e., A/V receiver, iPod, etc.) have their volume turned up to at least 50% of their volume level.
Sound interference	• Experiment with different orientations or locations of your sender device. • Make sure your sender device is more than 18 inches from any WiFi routers you may have. • Shorten the distance between the Rocketboost devices. The maximum distance is 150 feet (45 m), but this distance will be reduced as the wireless signal passes through walls or other obstructions. • It is possible other devices like cordless phones, microwaves, wireless routers, etc. may be causing interference. Try turning one device off at a time to determine which device is causing interference. • If your cordless phone or wireless router is causing interference try changing the channel it is using. Please refer to your device's owner manual.

Specifications

Sender/Receiver

Power supply	5 V, 600 mA
Maximum line-level input signal level	2.0 Vrms
Maximum line-level output signal level	1.0 Vrms
Output loading	10 kohm
Signal-to-noise ratio	90 dB
Dimensions (W × H × D)	5.8 × 4.13 × 0.91 inches (148 × 105 × 23 mm)
Weight	4.1 oz. (116 g)

Legal notices

FCC and IC Information:

This device complies with Part 15 of the FCC Rules and RSS-210 of the IC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause

harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC & IC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the exemption from the routine evaluation limits in section 2.5 of RSS 102.

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters from user and bystanders.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and users can obtain Canadian information on RF exposure and compliance from the Canadian Representative Richardson Technical Services Inc., Suite 304, 131 Wurtemburg St., Ottawa, Ontario, Canada. Tel: 613 562 3827

Rocketboost is a trademark of BBY Solutions, Inc.

Information for Users on Disposal of Old Equipment

European Union

Note: This symbol is only valid in the European Union.

This symbol indicates that the electrical and electronic equipment should not be disposed as general household waste at its end-of-life. Instead, the product should be handed over to the applicable collection point for the recycling in accordance with your national legislation.

By disposing of this product correctly, you will help to conserve natural resources and will help prevent potential negative effects on the environment and human health that could otherwise be caused by inappropriate waste handling of this product. For more information about collection point and recycling of this product, please contact your local municipal office, your household waste disposal service or the shop where you purchased the product.

Penalties may be applicable for incorrect disposal of this waste, in accordance with national legislation.

Other Countries Outside the European Union

If you wish to dispose of this product, please do so in accordance with applicable national legislation or other rules in your country for the treatment of old electrical and electronic equipment.

One-year limited warranty

Rocketfish Products ("Rocketfish") warrants to you, the original purchaser of this new **RF-RBAUX** ("Product"), that the Product shall be free of defects in the original manufacture of the material or workmanship for one (1) year from the purchase of the Product ("Warranty Period"). This Product must be purchased from an authorized dealer of Rocketfish brand products and packaged with this warranty statement. This warranty does not cover refurbished Product. If you notify Rocketfish during the Warranty Period of a defect covered by this warranty that requires service, terms of this warranty apply.

How long does the coverage last?

The Warranty Period lasts for one year (365 days), beginning on the date you purchased the Product. The purchase date is printed on the receipt you received with the product.

What does this warranty cover?

During the Warranty Period, if the original manufacture of the material or workmanship of the Product is determined to be defective by an authorized Rocketfish repair center or store personnel, Rocketfish will (at its sole option): (1) repair the Product with new or rebuilt parts; or (2) replace the Product at no charge with new or rebuilt comparable products or parts. Products and parts replaced under this warranty become the property of Rocketfish and are not returned to you. If service of Products and parts are required after the Warranty Period expires, you must pay all labor and parts charges. This warranty lasts as long as you own your Rocketfish Product during the Warranty Period. Warranty coverage terminates if you sell or otherwise transfer the Product.

How to obtain warranty service?

If you purchased the Product at a retail store location, take your original receipt and the Product to the store you purchased it from. Make sure that you place the Product in its original packaging or packaging that provides the same amount of protection as the original packaging. If you purchased the Product from an online web site, mail your original receipt and the Product to the address listed on the web site. Make sure that you put the Product in its original packaging or packaging that provides the same amount of protection as the original packaging.

Where is the warranty valid?

This warranty is valid only to the original purchaser of the Product in the United States, Canada, and Mexico.

What does the warranty not cover?

This warranty does not cover:

- Customer instruction
- Installation
- Set up adjustments
- Cosmetic damage
- Damage due to acts of God, such as lightning strikes
- Accident
- Misuse
- Abuse
- Negligence
- Commercial use
- Modification of any part of the Product, including the antenna

This warranty also does not cover:

- Damage due to incorrect operation or maintenance
- Connection to an incorrect voltage supply
- Attempted repair by anyone other than a facility authorized by Rocketfish to service the Product
- Products sold as is or with all faults
- Consumables, such as fuses or batteries
- Products where the factory applied serial number has been altered or removed

REPAIR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS YOUR EXCLUSIVE REMEDY. ROCKETFISH SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR THE BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THIS PRODUCT, INCLUDING, BUT NOT LIMITED TO, LOST DATA, LOSS OF USE OF YOUR PRODUCT, LOST BUSINESS OR LOST PROFITS. ROCKETFISH PRODUCTS MAKES NO OTHER EXPRESS WARRANTIES WITH RESPECT TO THE PRODUCT, ALL EXPRESS AND IMPLIED WARRANTIES FOR THE PRODUCT, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF AND CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO THE WARRANTY PERIOD SET FORTH ABOVE AND NO WARRANTIES, WHETHER EXPRESS OR IMPLIED, WILL APPLY AFTER THE WARRANTY PERIOD. SOME STATES, PROVINCES AND JURISDICTIONS DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE OR PROVINCE TO PROVINCE.

Contact Rocketfish:

For customer service please call 1-800-620-2790

www.rocketfishproducts.com

Distributed by Best Buy Purchasing, LLC

7601 Penn Avenue South, Richfield, Minnesota, U.S.A. 55423-3645

© 2010 BBY Solutions, Inc.

All rights reserved. ROCKETFISH is a trademark of BBY Solutions, Inc. Registered in some countries. All other products and brand names are trademarks of their respective owners.

For model number RF-RBAUX-05A:

Distributed by: Best Buy Europe Distributions Limited. 1 Portal Way, London W3 6RS

Freephone number for Rocketfish products: 0800 389 1120

www.rocketfishproducts.com (800) 620-2790
Distributed by Best Buy Purchasing, LLC
7601 Penn Avenue South, Richfield, MN 55423-3645 USA
© 2010 BBY Solutions, Inc.
All rights reserved. ROCKETFISH is a trademark of BBY Solutions, Inc.
All other products and brand names are trademarks of their respective owners.

For model number RF-RBAUX-05A:
Distributed by: Best Buy Europe Distributions Limited. 1 Portal Way, London W3 6RS
Freephone number for Rocketfish products: 0800 389 1120

10-1202
ENGLISH